

Datasheet | EC41 EP-355WON Series



General Purpose AC EMI Filter



*Image shown is for illustrative purpose only

Approvals /Conformance



Technical specifications

Operating voltage	440VAC (P-P)
Current rating	180A - 250A
Frequency	50/60Hz
Voltage drop	1 Volt max.
High potential test voltage	P -> E 1500VAC P -> P 2121VDC (applicable for general purpose filter)
Insulation resistance	≥ 300 MΩ @ 500VDC (P→E)
Operating temperature	40°c /-25°c +85°c

Features and benefits

- | All filters provide high attenuation performance.
- | All filters compliance to EN60939-3:2015 & EN60939-2:2005 standards
- | Single stage.
- | High reliable
- | Chassis mountable filter in fabricated metal can.
- | CRCA metal can with nickel plating provides good aesthetic and corrosion protection.
- | General purpose filter with low leakage current for safety critical application.
- | With surge suppressor filters also available.
- | Various terminal options are available.

Application

- | Electrical and electronic equipment
- | Test & measurement equipment
- | 3 Phase motor drive
- | Inverters and converters
- | Industrial automation application UPS, SMPS
- | Laser cutting tools
- | Packaging and drilling machine
- | Printing machine


Attenuation type

Single Stage


Standard

Electrical schematic for filter:

General Purpose -

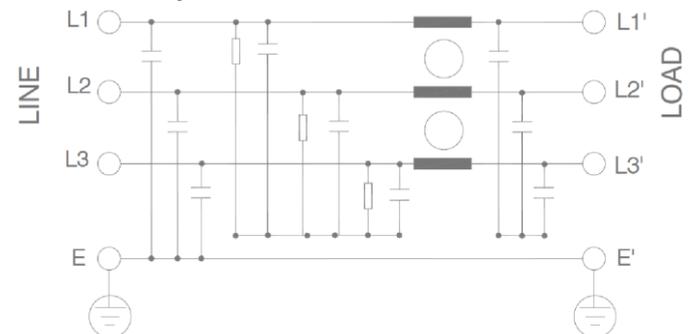

General Purpose with externally connected Surge Suppressor –

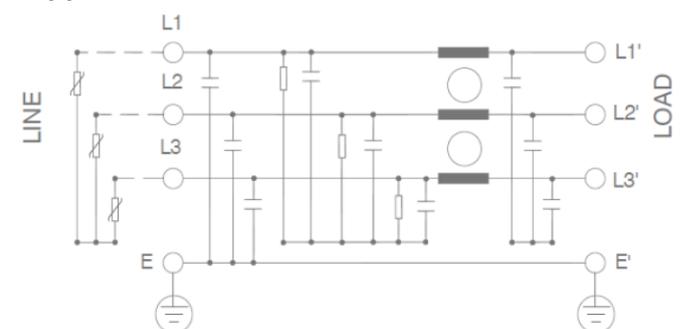


Datasheet | EC41

EP-355WON Series




Mechanical Details

Screw terminal

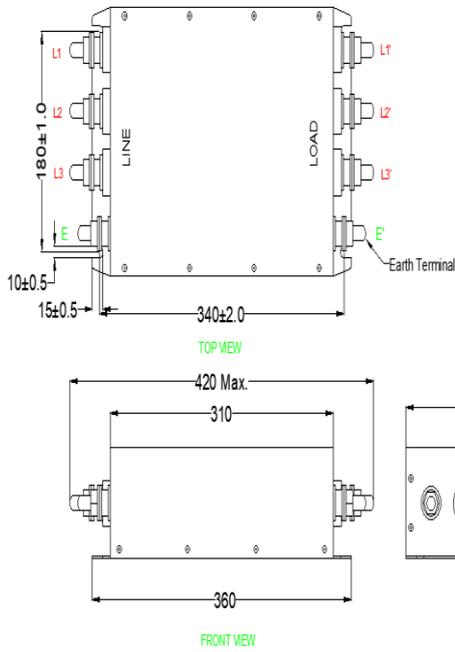

Touch safe terminal

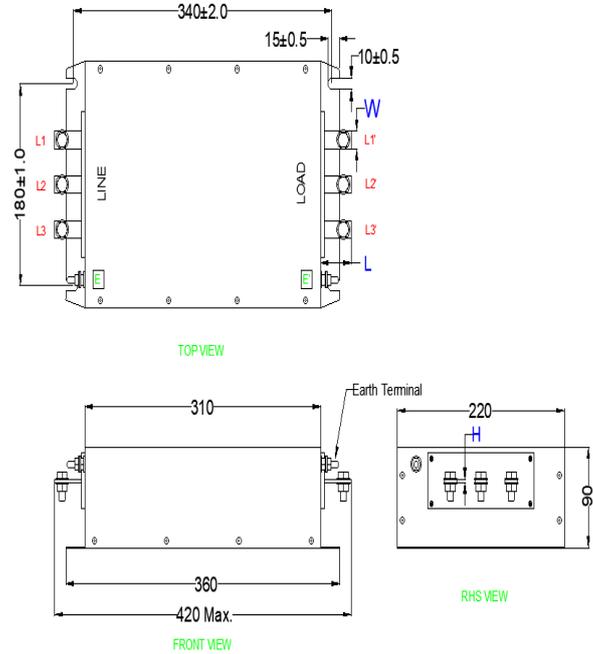

*All dimensions are in mm

General tolerance $\pm 2\%$

Filter Selection Table

Sr. No.	Elcom part codes (ordering code)	Rated Current rating (A) @40°C	Leakage current (mA) @250VAC	Terminals (X)		Max. Peak current (8/20 μ sec 1 time) (KA)	Energy surge rating (10/1000 μ sec) (Joules)	Approx. Weight (Kg)	Attenuation
				Screw	Bus bar				
1	EF-3A180X01E-C41	180	< 3.5	D	E	----	----	10	Standard
2	EF-3A180X12E-C41	180	< 3.5	D	E	10	350	10	Standard
3	EF-3A200X01E-C41	200	< 3.5	D	E	----	----	10	Standard
4	EF-3A200X12E-C41	200	< 3.5	D	E	10	350	10	Standard
5	EF-3A250X01E-C41	250	< 3.5	D	E	----	----	12	Standard
6	EF-3A250X12E-C41	250	< 3.5	D	E	10	350	12	Standard

- To compile complete part number, replace the 'X' with required I/O connection terminal. (e.g. EF-3A180D01E-C41)
- Maximum leakage under usual AC operating conditions (acc. IEC 60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.
- Customize products provided on request.

Datasheet | EC41

EP-355WON Series



Connection Method

Current Rating (A)	Screw terminal details		Bus bar terminal details		Earthing screw terminal details
	Screw	Recommended tightening torque	Bus bar (LxWxH)	connection screw terminal	
180	M12	35-40Kgcm	40x20x5	M8	M10
200	M12	35-40Kgcm	40x20x5	M8	M10
250	M12	35-40Kgcm	40x20x5	M8	M12

Filter attenuation graph

C = Common mode (asymmetrical) —————

D = Differential mode (symmetrical) - - - - -

