



PRODUCT CODE:- EMI-12 (Series)
EMI-13 (Series)

CATEGORY:- IEC INLET

BASIC DIMENSIONS:-

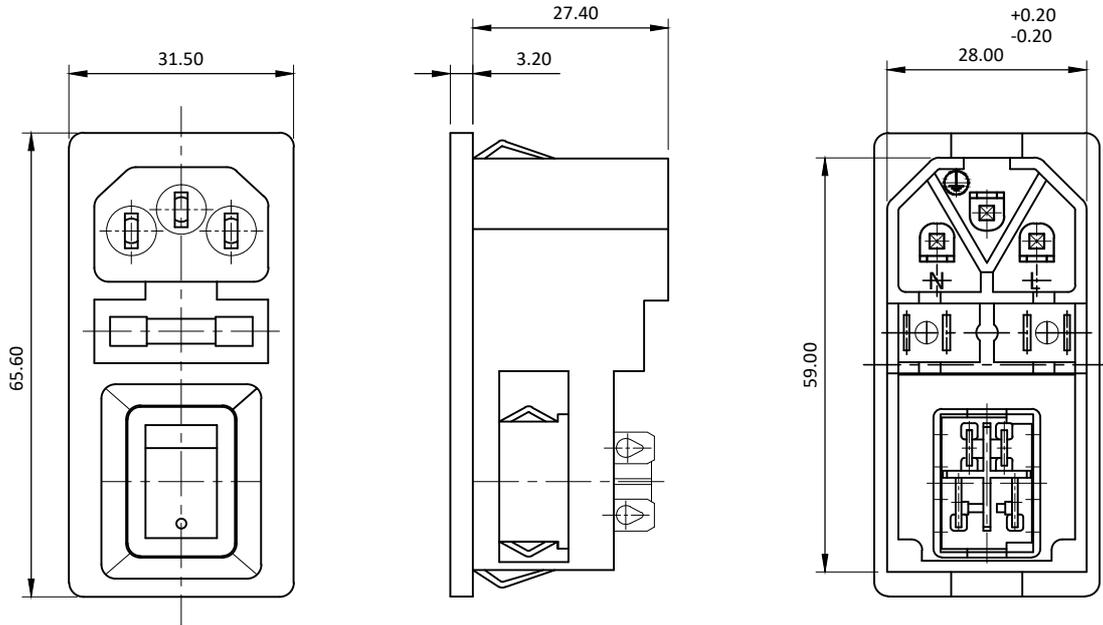

PANEL CUTOUT:-

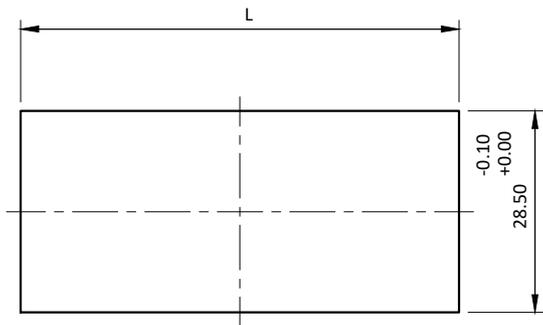

SR.NO	PANEL THICKNESS	LENGTH (L)
1	0.80 TO 1.5mm	61.10 ^{+0.20} / _{0.00}
2	1.50 TO 2.50mm	61.50 ^{+0.20} / _{0.00}

						APP	10.02.18	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com
						CHK	10.02.18	DPP	
						DRN	10.02.18	VICKY	
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN	
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER	
OVER	-	1	10	mm	Max.	NTS.	1 OF 2	P E M I 2 0 1 2	
UP TO	±	1	10	0.2	0.3	0.5		REVISION	0
Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.									

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved

PRODUCT CODE:- EMI-12 (Series)
EMI-13 (Series)

CATEGORY:- IEC INLET

SPECIFICATION TABLE:-


SR.NO.	PARAMETER		SPECIFICATION
1	V/A Rating		10A 250V AC
2	Switch Rating		4A : Standard 6A , 10A (On request, Please refer ordering code)
3	Contact Resistance (Initial)		10 mohms max.
4	Insulation Resistance At 500 V DC		1000 Mohms min.
5	H.V.Break Down Test (For 1-Minute)		2 KV AC
6	Panel Thickness		0.8 to 2.50
7	Mounting		Panel, Snap-in type
8	Terminals		Solder-type or Fast-on
9	Permissible Temp.	(a) With/Without Load	-25° To 70°C
		(b) For Soldering	270°C for 5 Sec. max.
10	Material	(a) Body	Nylon-6, GF20%, V-2.
		(b) Terminals	Brass, Tin plating
		(c) Contacts	Connector-Brass/Copper Tin plating, Switch-Silver plating.
11	Reference Standards		IEC 60320-1, IEC 61058-1, IEC 60127-6, CSA : C22.2 No.60320-1-11
12	Compliance Marking		
13	Approvals		

ORDERING CODE DESCRIPTION:-

Series	Switch type	Switch/Fuse holder	Switch Current rating	Switch Color Code
EMI	12 Illuminated	NO Suffix With Switch	NO Suffix 4A Switch	03 Black
	13 Non-Illuminated	NS No Switch	G 6A Switch	04 Red
		F Fuse link slow blow	H 10A Switch	07 Green

FOR EXAMPLE

EMI-12	INLET WITH 4A RATING
EMI-12-G	INLET WITH 6A RATING
EMI-12-H	INLET WITH 10A RATING

						APP	10.02.18	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com	
						CHK	10.02.18	DPP		
						DRN	10.02.18	VICKY		
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN		
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-	PROJECTION	SHEET	DRAWING NUMBER		
OVER	-	1	10	mm	Max.	NTS.		2 OF 2	P E M I 2 0 1 2	REVISION
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.						0
±	0.2	0.3	0.5							

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved