PRODUCT CODE:- **EMI-14-X (Series)**

CATEGORY:- **IEC INLET**

BASIC DIMENSIONS:-

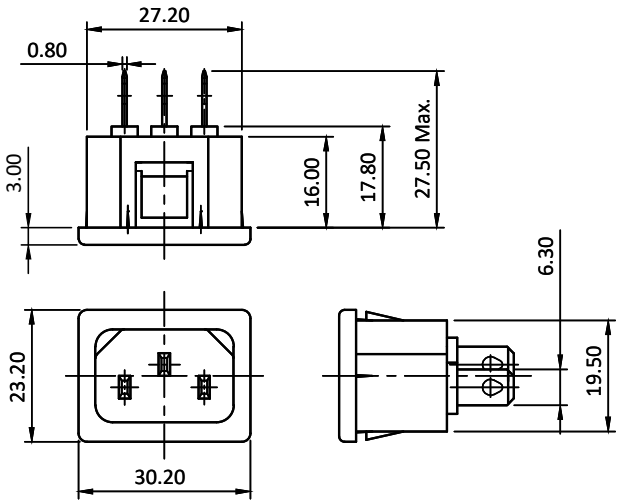

PANEL CUTOUT:-



TERMINALS

(Scale:- 1:1)

6.3x0.8 (T5)



SPECIFICATION TABLE:-

SR.NO.	PARAMETER		RAMARKS.
1	V/A Rating		10A 250V AC 15A 250V AC
2	Contact resistance (Initial)		10 mohms max.
3	Insulation resistance at 500 V DC		1000 Mohms min.
4	H.V.Break down test (For 1minute)		2 KV AC
5	Panel thickness (Max.) **Other : Available on request**		Standard : 1.5 Refer Ordering Table
6	Mounting		Panel, Snap-in type
7	Terminals		Solder-type / Fast-on 6.3
8	Permissible temp.	(a)With/Without load	0°C To 70°C 0°C To 65°C ⊛
		(b)For Soldering	270°C for 5 Sec max.
9	Material	(a)Body	Nylon-6, GF20%, V2
		(b)Contacts, Terminals	Brass, Tin plating
10	Reference standard		IEC 60320-1, IEC 60320-3 UL-498, CSA:C22.2 No. 182.3
11	Compliance Marking		
12	Approvals		

⊛ : Also available for temp. rating up to 125°C on request (For UL only)

ORDERING CODE:-

SERIES: EMI-14

PANEL THICKNESS

No Suffix	1.5
K	0.9
A	1.0
B	1.2
D	1.8
E	2.0
G	2.5
J	3.0

TERMINAL DETAILS

		A (Capsule Hole)	B (Drop Hole)	C (Fast-on)
T5	6.3x0.80			

EXAMPLE :-

1)EMI-14-T5B

2)EMI-14-JT5B

REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN
						APP	18.05.06	SBP
						CHK	18.05.06	SNV
						DRN	18.05.06	SNV

ELCOM
Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India
Elcom International Pvt. Ltd.
www.elcom-in.com

UNSP.TOLERANCE				DIMNS. IN mm	WT(Gm) Max.	SCALE:- NTS.	PROJECTION	SHEET	DRAWING NUMBER
OVER	-	1	10	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.				1 OF 1	P E M I 2 0 1 4 REVISION 0
UP TO	1	10	-						
±	0.2	0.3	0.5						

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved