


PRODUCT CODE:- EPC-1314M (Series)


CATEGORY:- Mains Cord with IEC connector combination

BASIC DIMENSIONS:-


EPC1314M1 Series

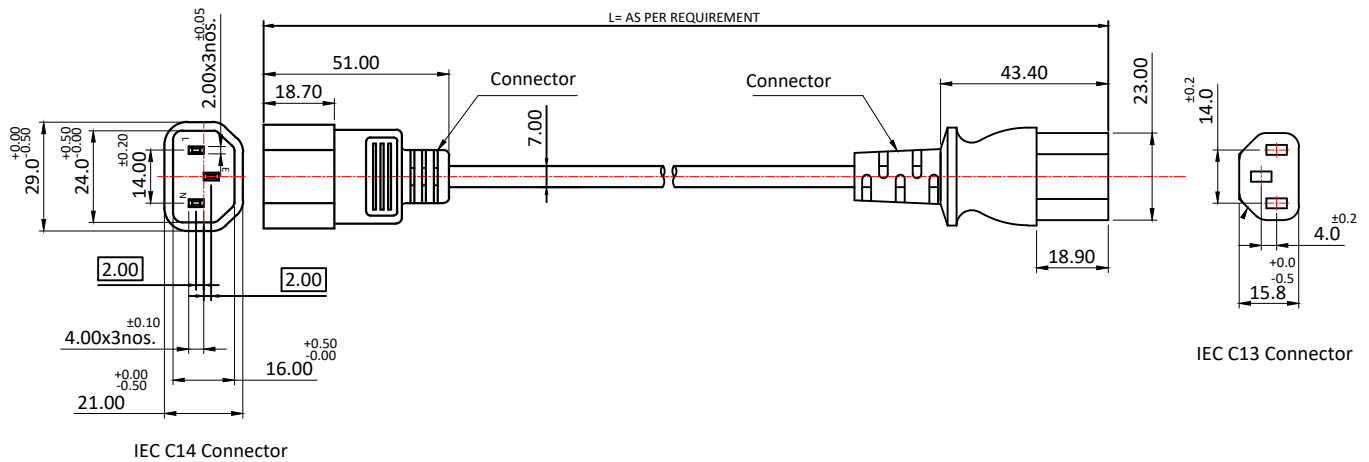


EPC1314M2 Series

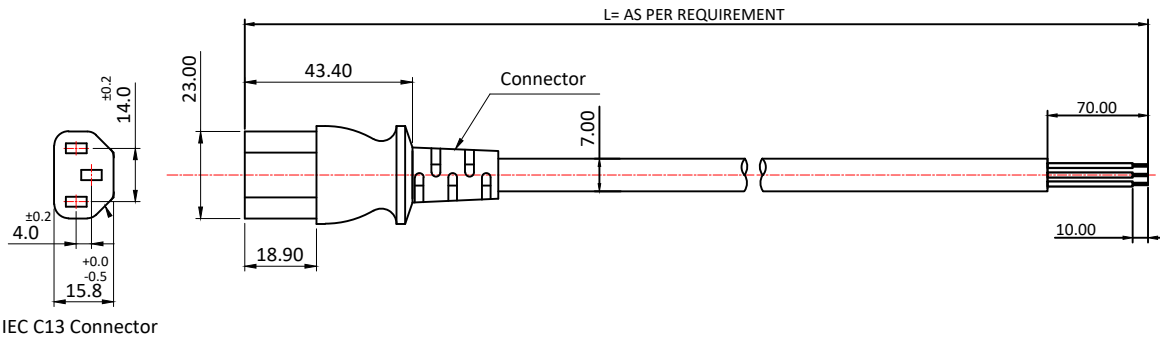

EPC1314M3 Series

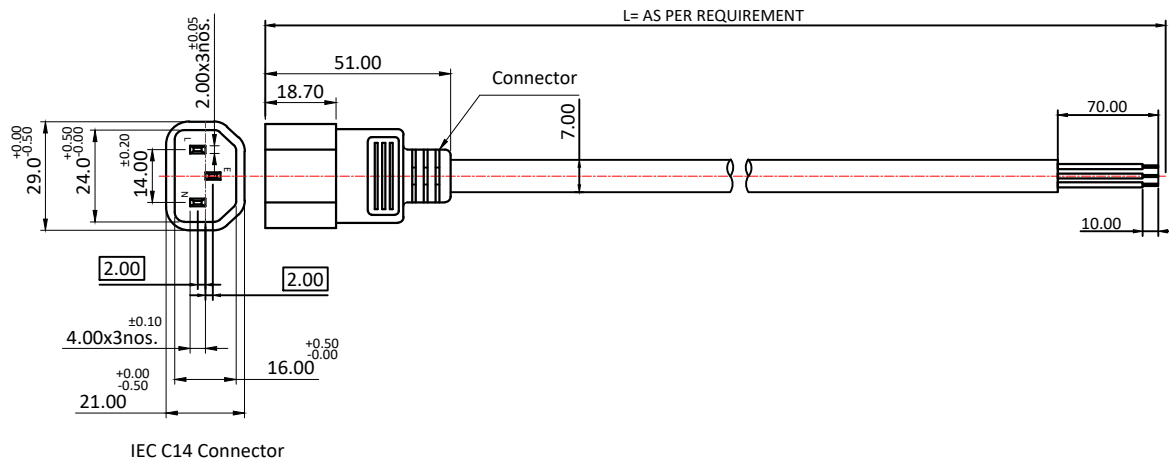

REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN	 <p>Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com</p>			
					APP		04.07.19	GJG				
					CHK		04.07.19	KAK				
					DRN		04.07.19	SSD				
UNSP.TOLERANCE			DIMNS. IN	WT(Gm)	SCALE:-		PROJECTION		SHEET		DRAWING NUMBER	
OVER	-	1	10	mm	Max.	NTS.	1 OF 2		1		P E I O 2 0 4 0	
UP TO	1	10	-	Moulding, plating details as per Bill of Material				1		2		REVISION
±	0.2	0.3	0.5	Unspecified colour is Black, GF:Glass filled.				1		2		0



F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved

PRODUCT CODE:-	EPC-1314M (Series)	CATEGORY:-	Mains Cord with IEC connector combination
----------------	--------------------	------------	---

SPECIFICATION TABLE:-



SR.NO	PARAMETER		SPECIFICATION
1	Cord Type		Mains Cord with IEC connector combination
2	V/A Rating		10Amp 250V AC (Max.)
3	Insulation Resistance at 500 V DC		100 M Ohms Min.
4	H.V.Break Down Test (For 1-Minute)		1.5 KV AC.
5	Permissible Temp.	(a) With/Without Load	-20°C TO 70°C
6	Length (L), Meters		As per Requirement
7	MATERIAL	(a) Inlet & Outlet Body	Polyamide
		(b) Cable & Sleeve	PVC
		(c) Conductors	Copper
		(d) Conductor (Size)	As per Requirement
		(e) Contacts	Brass, Nickel Plated
8	Reference Standards		IEC-60320-1,IEC-60320-3,IEC-60799
9	Compliance Marking		  (On request, Please refer ordering code for suffix)

ORDERING CODE:-

EPC1314M	Combination	Wire size		Length	Colour		Compliance Marking	
Elcom power cord with IEC C13 & C14 Moulded Conn.	1 Cord with IEC C13 & C14 Moulded Conn.	Type	wire size	current Rating	Length as per Requirement.		NO SUFFIX	Without Approval
	2 Cord with IEC C13 Moulded Conn and other end open.	50	0.5 Sq.mm.	4A	1.0	1.0 Meter	04	Red
	3 Cord with IEC C14 Moulded Conn and other end open.	75	0.75 Sq.mm.	6A	1.5	1.5 Meter	05	Blue
		1A	1.0 Sq.mm.	10A	2.0	2.0 Meter	10	White
		1B	1.5 Sq.mm.	15A				

Example:

- 1) EPC1314M1501.004
- 2) EPC1314M2501.004V

						APP	04.07.19	GJG	 Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd. www.elcom-in.com	
						CHK	04.07.19	KAK		
						DRN	04.07.19	SSD		
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN		
UNSP.TOLERANCE			DIMNS. IN mm	WT(Gm) Max.	SCALE:- NTS.		PROJECTION	SHEET	DRAWING NUMBER	
OVER	-	1	10							
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.				2 OF 2		
±	0.2	0.3	0.5						REVISION	
									0	

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved