

PRODUCT CODE:-


EPC-1314R (Series)

CATEGORY:-


Mains Cord with IEC  
connector combination

## BASIC DIMENSIONS:-


## EPC1314R1 Series

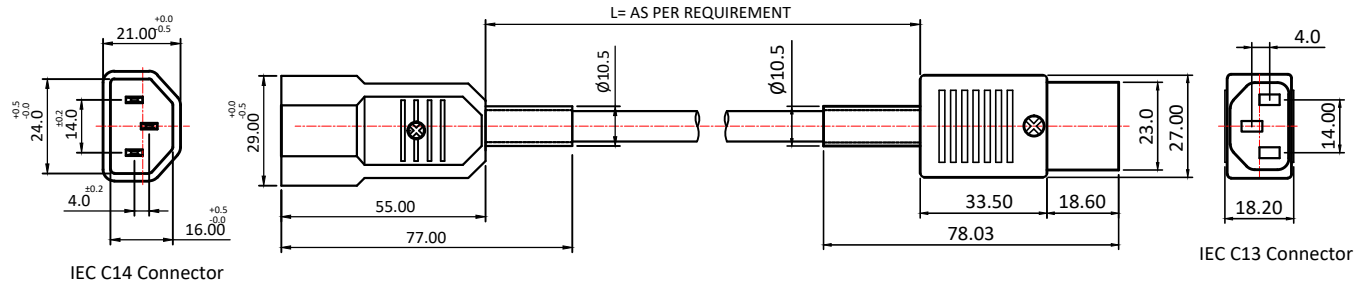


## EPC1314R2 Series

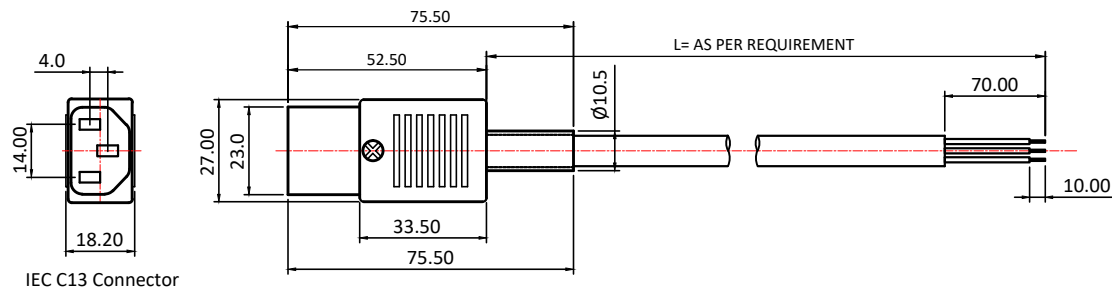

## EPC1314R3 Series

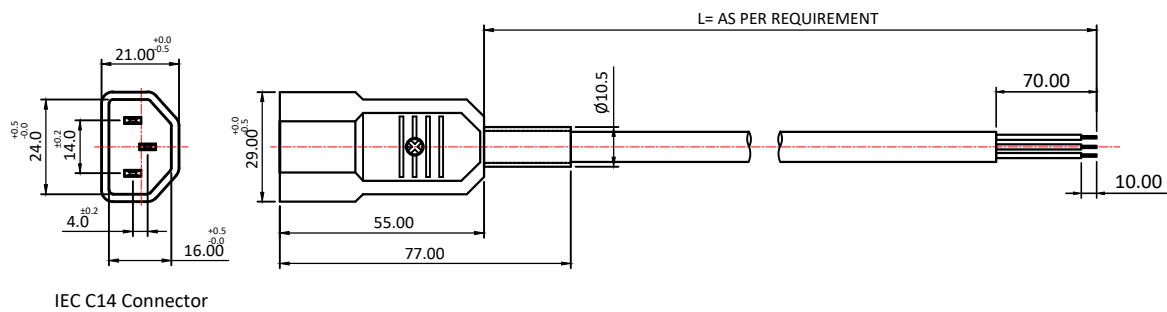

						APP	04.07.19	GJG	<div><div>Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India</div><div>Elcom International Pvt. Ltd.</div><div>www.elcom-in.com</div></div>											
						CHK	04.07.19	KAK												
						DRN	04.07.19	SSD												
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN												
UNSP.TOLERANCE				DIMNS. IN mm	WT(Gm) Max.	SCALE:- NTS.	PROJECTION	SHEET	DRAWING NUMBER											
OVER	-	1	10						P E I O 2 0 4 0											
UP TO	1	10	-						REVISION											
±	0.2	0.3	0.5	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.						1 OF 2	0									


F:ENG-08.00

Note: Technical specifications are subject to change without prior notice


Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved

PRODUCT CODE:-	EPC-1314R (Series)	CATEGORY:-	Mains Cord with IEC connector combination
----------------	--------------------	------------	---

#### SPECIFICATION TABLE:-



SR.NO	PARAMETER		SPECIFICATION
1	Cord Type		Mains Cord with IEC connector combination
2	V/A Rating		10Amp 250V AC (Max.)
3	Insulation Resistance at 500 V DC		100 M Ohms Min.
4	H.V.Break Down Test (For 1-Minute)		1.5 KV AC.
5	Permissible Temp.	(a) With/Without Load	-20°C TO 70°C
6	Length (L), Meters		As per Requirement
7	MATERIAL	(a) Inlet & Outlet Body	Polyamide
		(b) Cable & Sleeve	PVC
		(c) Conductors	Copper
		(d) Conductor (Size)	As per Requirement
		(e) Contacts	Brass, Nickel Plated
8	Reference Standards		IEC-60320-1,IEC-60320-3,IEC-60799
9	Compliance Marking		 (On request, Please refer ordering code for suffix)

#### ORDERING CODE:-

EPC1314R	Combination		Wire size			Length		Colour		Compliance Marking	
Elcom power cord with IEC C13 & C14 Rewirable Conn.	1	Cord with IEC C13 & C14 Rewirable Conn.	Type	wire size	current Rating	Length as per Requirement.		NO SUFFIX	Black(Standard)	NO SUFFIX	Without Approval
	2	Cord with IEC C13 Rewirable Conn and other end open.	50	0.5 Sq.mm.	4A	1.0	1.0 Meter	04	Red	V	
	3	Cord with IEC C14 Rewirable Conn and other end open.	75	0.75 Sq.mm.	6A	1.5	1.5 Meter	05	Blue		
			1A	1.0 Sq.mm.	10A	2.0	2.0 Meter	10	White		
			1B	1.5 Sq.mm.	15A						

#### Example:

- 1) EPC1314R1501.004
- 2) EPC1314R2501.004V

						APP	04.07.19	GJG	 <div>Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India</div> <div>Elcom International Pvt. Ltd.</div> <div>www.elcom-in.com</div>											
						CHK	04.07.19	KAK												
						DRN	04.07.19	SSD												
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN												
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)		SCALE:-		PROJECTION	SHEET	DRAWING NUMBER									
OVER	-	1	10	mm	Max.		NTS.			2 OF 2	P	E	I	O	2	0	4	0	REVISION	
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.																
±	0.2	0.3	0.5																	

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved