
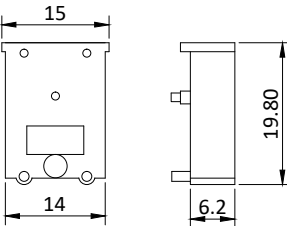

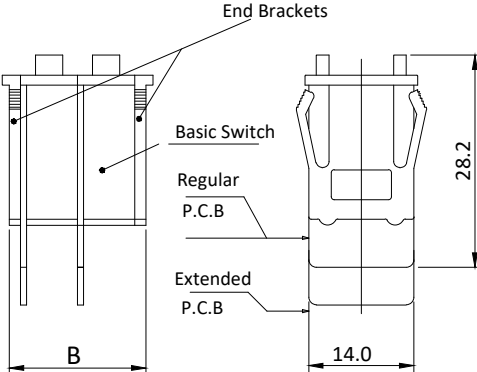
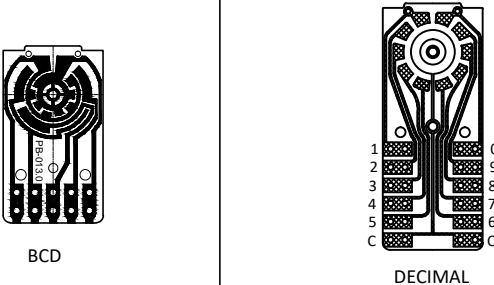





PRODUCT CODE:-		PCS-14 Series		CATEGORY:-		PUSH CODER SWITCH	
BASIC DIMENSIONS				DS-14		PANEL CUT OUT	
						 <div><p>n = Number of Switches in a bank</p><p>A = (7.62xn) + 5.0</p><p>B = (7.62xn) + 3.0</p><p>C = (7.62xn) + 3.3</p></div>	
				PCB		 <div><p>BCD</p><p>DECIMAL</p></div>	

SPECIFICATION TABLE

SR. NO.	PARAMETER		SPECIFICATIONS
1	V/A Rating (Standard)		100 mA , 50 V AC / 28 V DC
2	Continuous Current		1 Amp Max.
3	Insulation Resistance at 500 V DC		100 Mega Ohms Min.
4	Contact Resistance (Initial)		200 m Max. 
5	High Voltage Test (For 1 Minute)		500 V AC
6	Panel Thickness		0.80 - 2.00
7	Permissible Temp.	(a) With / Without Load	-25°C TO +85°C
		(b) For Soldering	270°C, 5 Sec Max
8	Mounting		Panel With Snap
9	Life (With laod)		10,000 Cycles Minimum
10	Material	Housing, End brackets	Engineering Thermo Plastic
		Dummy Spacer	Engineering Thermo Plastic
		P.C.B.	Glass Epoxy, Gold Plated
11	Reference Standard		IEC 1020-5
12	Compliance Marking		--

						APP	07.08.07	SBP	<div><div>Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India</div><div>Elcom International Pvt. Ltd.</div><div>www.elcom-in.com</div></div>															
						CHK	07.08.07	GJG																
						DRN	07.08.07	UAJ																
REV	IS		WAS		DATE	SIGN	APP.	BY	DATE	SIGN														
UNSP.TOLERANCE				DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION		SHEET		DRAWING NUMBER										
OVER	-	1	10	mm		Max.		NTS.				1 OF 2		P	P	C	S	2	0	1	4	REVISION		
UP TO	0.1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.															0					
±	0.2	0.3	0.5																					

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved

PRODUCT CODE:-	PCS-14 Series	CATEGORY:-	PUSH CODER SWITCH
----------------	---------------	------------	-------------------



ORDERING CODE

Series	TYPE
PCS-140	Switch with Binary Output

Series	TYPE
PCS-141	Switch with Decimal Output

Series	TYPE
EB-14	End Bracket Pair

Series	TYPE
DS-14	Dummy Spacer

						APP	07.08.07	SBP	 <div>Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India</div> <div>Elcom International Pvt. Ltd.</div> <div>www.elcom-in.com</div>									
						CHK	07.08.07	GJG										
						DRN	07.08.07	UAJ										
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN										
UNSP.TOLERANCE				DIMNS. IN	WT(Gm)	SCALE:-		SHEET	DRAWING NUMBER									
OVER	-	1	10	mm	Max.	NTS.			P	P	C	S	2	0	1	4	REVISION	
UP TO	1	10	-	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.					2	OF	2	0						
±	0.2	0.3	0.5															

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2019 by Elcom International Pvt.Ltd, India. All rights reserved