Power Distribution Unit

Product code/Part code:EBP-S314B-8E37JVX

Specification sheet:

Input

• Voltage:	1Φ,120VAC
• Frequency:	50Hz/60Hz (as per supply input)
• Power in socket type:	With moulded NEMA 5-15P plug
• Power cord :	Power cord 14 AWG 3 core 3 meter with moulded NEMA 5-15P plug
• Input current:	15A

Output

• Voltage:	1Φ,120VAC
• Frequency:	50Hz/60Hz (as per supply input)
• Power out socket type:	ENO-1112-X snap fit 15A NEMA socket
• Current operating range:	15A

Features

- Rack mountable
- Vertical Mounting
- Single input power source
- With LED Power indicator
- Protection with 15A thermal ressetable circuit breaker
- Total no. of outlets: 14nos.[ENO-1112-X snap fit 15A NEMA socket]

Mechanical

- Dimensions (L x W x H): 838.1mm(33”)x 44.45mm(1.75”)x 44.45mm(1.75”)
- Weight: Approx.1.8Kg for aluminium
- Weight: Approx.2.8Kg for CRCA
- Button Mounting: 738.1mm(29.06”)
- Color: RAL 9005
- Finish: Texture

Environmental requirements

- Operating temperature: 0–45°C
- Humidity : 0–95 % RH non-condensing

Approvals

- cULus

Environmental Compliance

- RoHS

Compliance marking

- CE
- cULus

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved

Product drawing :

PRODUCT CODE : EBP-S314B-8E37JVX	CATEGORY : BASIC PDU

BASIC DIMENSIONS

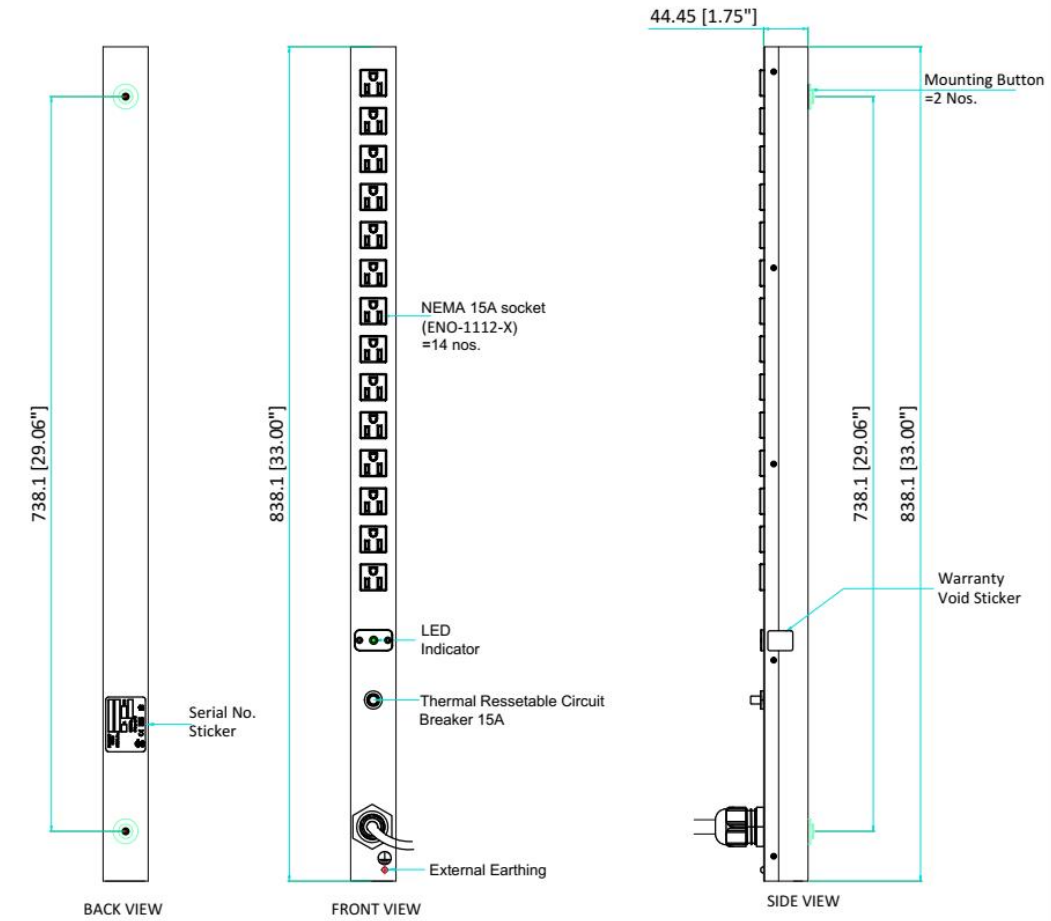

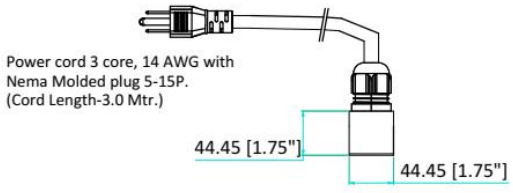

BOTTOM VIEW

* General tolerance : +/- 2.0 mm

REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN
						APP	15.11.24	JDP
						CHK	15.11.24	PHB
						DRN	15.11.24	DMD

Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India
Elcom International Pvt. Ltd.

UNSP.TOLERANCE				DIMNS. IN mm	WT(Gm) Max.	SCALE:- NTS.	PROJECTION	SHEET	DRAWING NUMBER
OVER	-	1	10	Powder coating : Ral 9005 Texture				1 OF 1	REVISION D0
UP TO	1	10	-						
±	0.2	0.3	0.5						

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved