Smart Power Distribution Unit

Product Code/Part Code: EIS-T624A-EE3FWVX

Specification Sheet:

Input

• Input Acceptable Voltage:	3Φ, 415-440VAC
• Frequency:	50 Hz / 60Hz
• Input Plug:	3Φ, 32 Amps, IEC 60309(3P+N+E), 440VAC
• Cord Length:	3 meters
• Input Current:	32 Amps

Output

• Voltage:	230-250 VAC per phase
• Frequency:	50Hz / 60Hz
• Receptacles Configuration:	IEC-60320 C13 (18 Nos.), IEC-60320 C19 (06 Nos.)
• Current Operating range:	32 Amps per phase

Branch Circuit Protection:

- Six (6) X 16A Hydraulic Magnetic Circuit Breakers(A).

Mechanical

- Dimensions (L x W x H): 1750mm (68.89”) X 60mm (2.36”) X 85mm (3.34”)
- Weight: Approx. 7.80 Kg (17.20 lbs.)
- Mounting: 1443.50mm (56.83”)
- Display / control panel: 1.77” TFT Color Display
- Color: RAL 9005
- Material: Aluminum
- Finish: Fine texture

User Interface:

- Integrates with any DCIM System through SNMP or MODBUS RTU/ MODBUS TCP

Environmental Requirements

- Operating temperature: 0 – 45°C (Extended up to 60°C)
- Humidity: 0 – 95 % RH non-condensing

Copyright © 2025 by Elcom International Pvt. Ltd, India. All rights reserved

Features

- Individual Current Monitoring: Monitors the Individual / Total current flowing through the device.
- Individual Switching: Individual Receptacle level ON-OFF Switching.
- Conforms to Class 1 metering accuracy.
- Receptacles Level Monitoring and Metering of electrical parameters: Voltage (V), Current (I), Energy (kWh) Power (kVA, kW), Power factor (cos Φ).
- Threshold settings for input current with warning LED on the front panel and Buzzer alarm.
- 1.77" TFT Color LCD to display electrical parameters and PDU information
- Networking: Dual Ethernet Ports –10/100 Mbps and 10/100/1000 Mbps
- Provision to connect Elcom make Temperature - Humidity Sensors.
- Hot Swappable Controller
- Circuit Breaker trip detection
- Firmware upgrade and log export can be performed through a Web Browser
- Total No. of outlets: 24- IEC-60320 C13 (18 Nos.), IEC-60320 C19 (06 Nos.)

Interface and Protocol Support

- HTTP, HTTP(s)
- SNMP v1, v2c, v3
- MODBUS RTU & MODBUS TCP
- FTP
- DHCP
- IPV4, IPV6 Support
- Telnet (CLI)
- NTP
- SMTP
- Syslog
- LDAP
- RADIUS
- TACACS+
- TLS 1.2 and above

Conformance

Approvals

- cULus
- UL

Compliance Marking

- CE
- RoHS

Copyright © 2025 by Elcom International Pvt. Ltd, India. All rights reserved

Product Drawing

PRODUCT CODE:-	EIS-T624A-EE3FWVX	CATEGORY:-	SMART RACK-PDU

BASIC DIMENSIONS

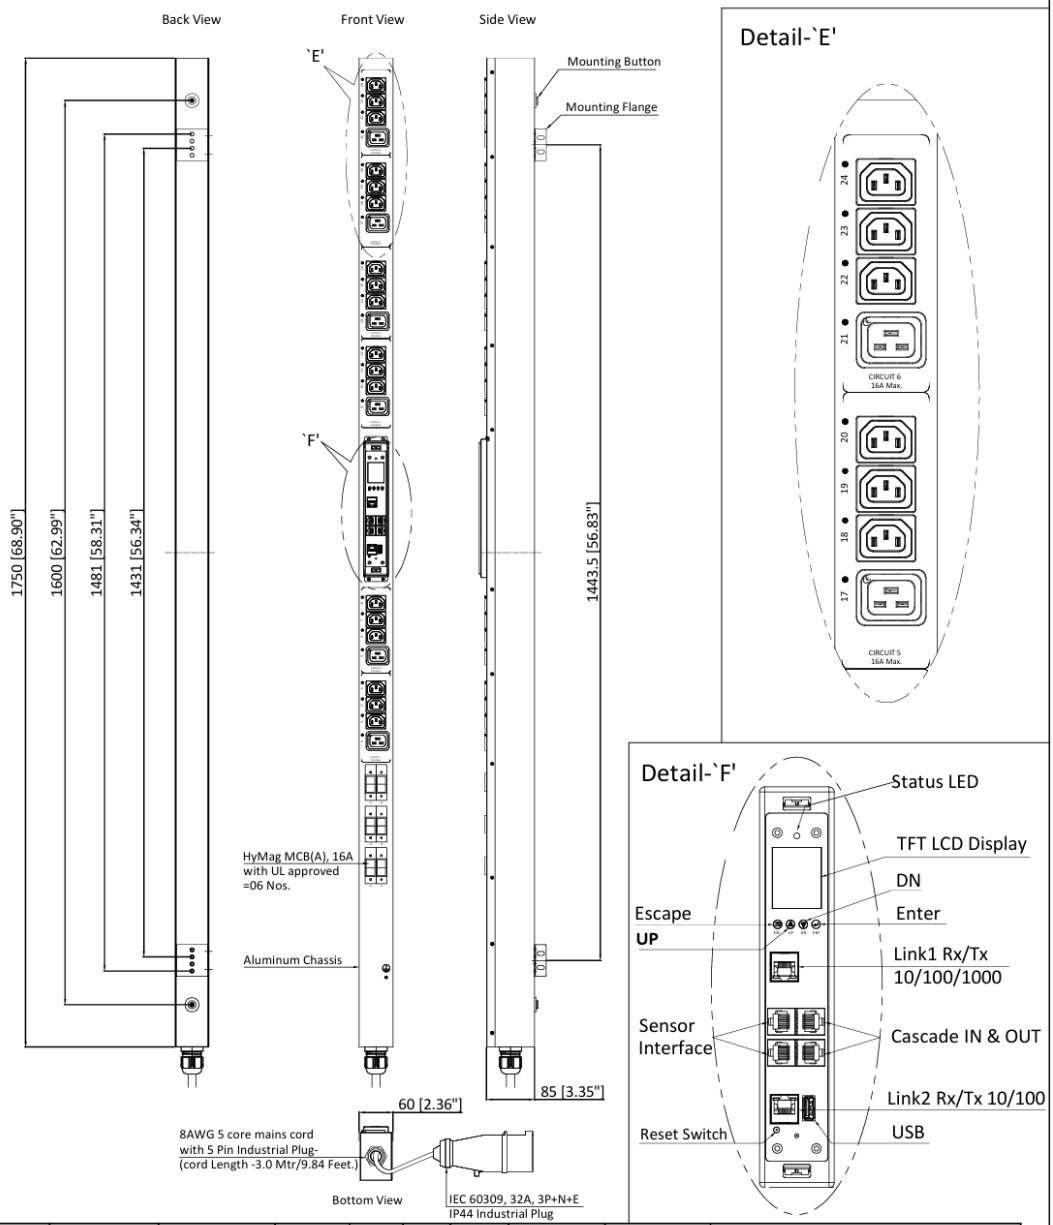

						APP	14.05.25	DPP
						CHK	14.05.25	SSY
						DRN	14.05.25	AVP
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN

ELCOM
Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India
Elcom International Pvt. Ltd.
www.elcom-in.com

UNSP.TOLERANCE				DIMNS. IN mm	WT(Gm) Max.	SCALE:- NTS.	PROJECTION	SHEET	DRAWING NUMBER
OVER	-	1	10	Moulding, plating details as per Bill of Material Unspecified colour is Black, GF:Glass filled.				1 OF 1	- - - - - - - - REVISION D0
UP TO	1	10	-						
±	0.2	0.3	0.5						

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2025 by Elcom International Pvt.Ltd, India. All rights reserved

Copyright © 2025 by Elcom International Pvt. Ltd, India. All rights reserved