



Power Distribution Unit

Product Code/Part Code: E03-C36NE

Specification sheet:

Input

• Voltage:	3 Φ , 250 VAC (P-N) 440 VAC (P-P)
• Frequency:	50Hz/60Hz(as per supply input)
• Power in socket type:	32A 5 pin Industrial plug IP44(3P+N+E)
• Power cord:	FRLS, 6 sq.mm, 5 core, 3 meter with 32A 5 pin rewirable industrial plug IP44(3P+N+E)
• Input current:	32Amps

Output

• Voltage:	1 Φ , 250VAC
• Frequency:	50Hz/60Hz(as per supply input)
• Power out socket type:	IEC-C13 & IEC-C19 outlet
• Current operating range:	32Amps per phase

Features

- Rack-mountable
- 0U Vertical mounting
- Single input power source
- Protection with per phase single pole 32A “D” curve MCB with safety guard
- With per MCB green LED Indicator
- Internal wiring with Uni-nyvin cable
- Total no. of outlets: 36nos.[IEC-C13 lockable outlet =8nos. per phase & IEC-C19 lockable outlet =4nos.per phase]
- With mounting bracket spare =2nos.
- With external earthing provision.
- Reference standard :- IEC 62368-1

Mechanical

- Dimensions(L x W x H): (1750 x 55 x 60)mm
- Weight: approx.6.2Kg
- Mounting: 1725mm
- Button mounting : 1600mm
- Color: RAL 9005
- Finish: Texture

Environmental requirements

- Operating temperature:0 –45°C (Extended up to 60°C)
- Humidity:0–95 % RH non-condensing


Compliance marking

- CE
- RoHS


Product drawing:

PRODUCT CODE : E03-C36NE	CATEGORY : BASIC PDU
------------------------------------	--------------------------------

BASIC DIMENSIONS

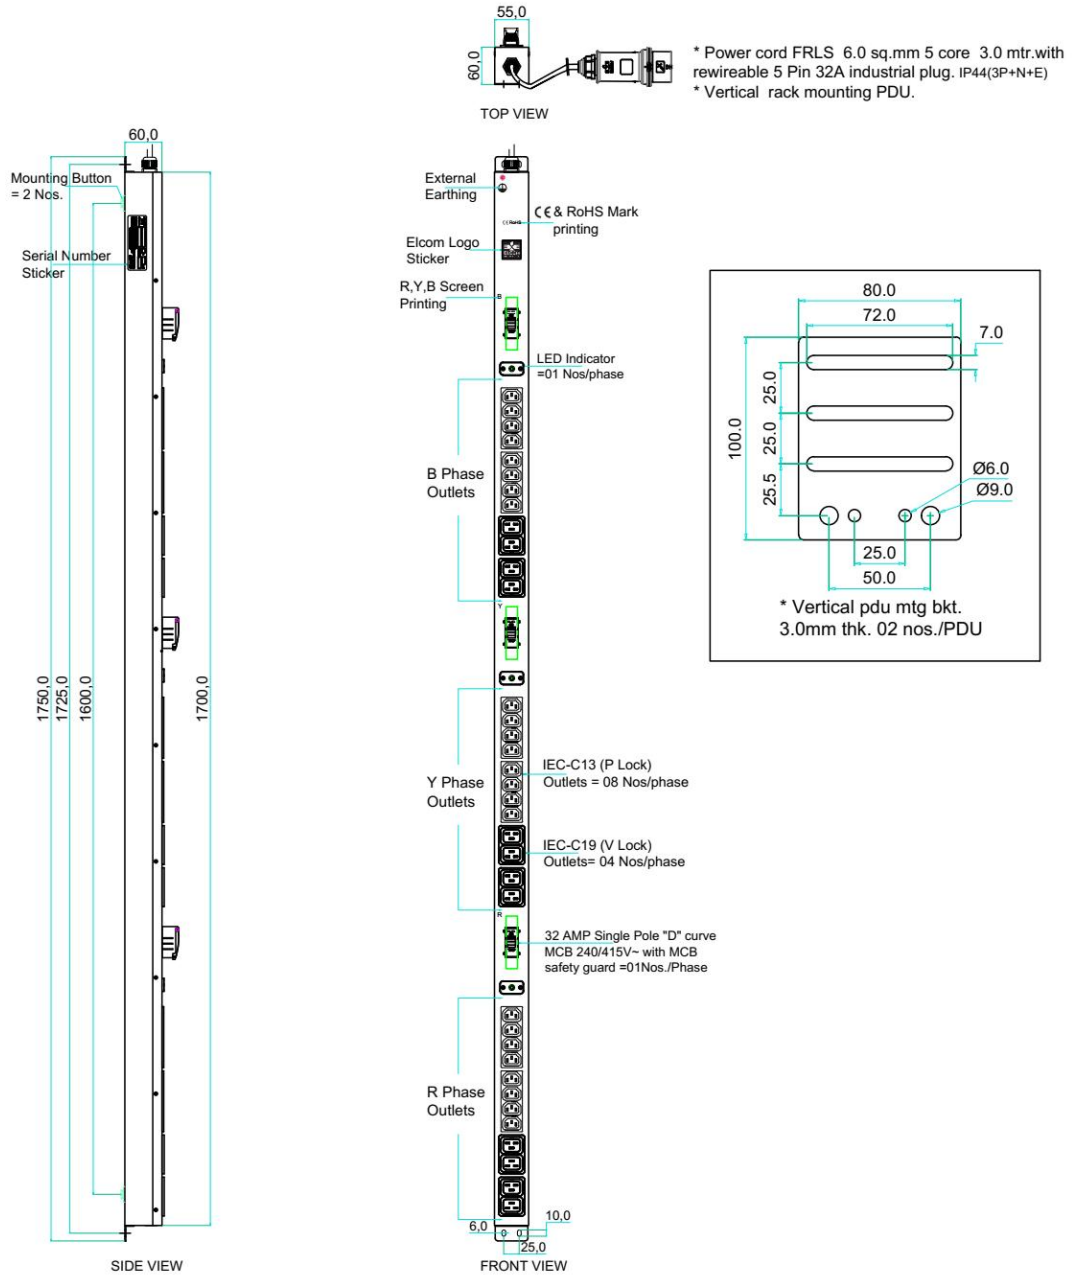

* General tolerance : +/- 2.0 mm

						APP	28.11.24	JDP	 <p>Plot E-4, Kagal Five Star MIDC, Kagal, Kolhapur, MH - 416236, India Elcom International Pvt. Ltd.</p>	
						CHK	28.11.24	PHB		
						DRN	28.11.24	SSK		
REV	IS	WAS	DATE	SIGN	APP.	BY	DATE	SIGN		
UNSP.TOLERANCE		DIMNS. IN		WT(Gm)		SCALE:-		PROJECTION	SHEET	
OVER	-	1	10	mm		Max.		NTS.	1 OF 1	
UP TO	1	10	-	Powder coating : Ral 9005 Texture(Black)						
±	0.2	0.3	0.5							REVISION
									D0	

F:ENG-08.00

Note: Technical specifications are subject to change without prior notice

Copyright © 2024 by Elcom International Pvt.Ltd, India. All rights reserved